


Double and Multi-leg bridles are measured a little differently than Basic Eye & Eye type slings. The hardware positioned at the 'top' of the assembly is normally not included in the length of the sling. The measurement is taken from the bearing point of the attachment, or eye, at the bottom of the assembly to the bearing of the wire rope sling that attaches to the link at the top of the assembly.

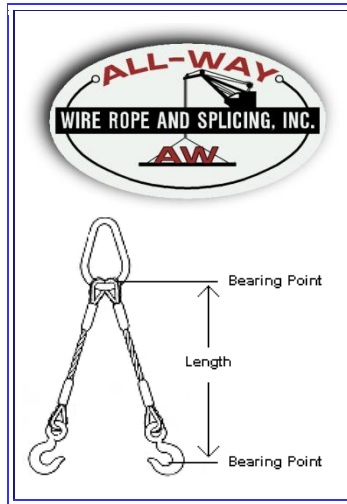

WIRE ROPE DIAMETER.	2 LEG BRIDLE CAPACITIES-EIP GRADE		
1/4"	.65-TONS	.91-TONS	1.1-TONS
5/16	1.0-TONS	1.4-TONS	1.7-TONS
3/8"	1.4-TONS	2.0-TONS	2.5-TONS
7/16"	1.9-TONS	2.7-TONS	3.4-TONS
1/2"	2.5-TONS	3.6-TONS	4.4-TONS
9/16"	3.2-TONS	4.5-TONS	5.5-TONS
5/8"	3.9-TONS	5.5-TONS	6.8-TONS
3/4"	5.6-TONS	7.9-TONS	9.7-TONS
7/8"	7.6-TONS	11-TONS	13-TONS
1"	9.8-TONS	14-TONS	17-TONS
1-1/8"	12-TONS	17-TONS	21-TONS
1-1/4"	15-TONS	21-TONS	26-TONS
1-3/8"	18-TONS	25-TONS	31-TONS
1-1/2"	21-TONS	30-TONS	37-TONS
1-5/8"	24-TONS	35-TONS	42-TONS
1-3/4"	28-TONS	40-TONS	49-TONS
2"	37-TONS	52-TONS	63-TONS