



ALL MATERIAL HANDLING LIFTING EQUIPMENT

Home/Prod About Us Contact Us News **On-Sale** Login Service Literature

CALL AMH AT (877)543-8264 FOR A DISTRIBUTOR NEAR YOU!

Home > Lever Chain Hoist LA SERIES



LEVER CHAIN HOIST LA SERIES^{CE}

FEATURES


- **Dual rated with more choices of capacity**
- **Hook blocks are bolted allowing easy disassembly for complete hook inspection**
- Lightweight and durable all steel construction with powder coated finish and plated external components to resist corrosion
- Premium Grade 80 Zinc plated alloy load chain manufactured in Germany, Austria or Japan
- Self adjusting double pawl disk type mechanical load brake insures control
- Horseshoe chain guard allows operation in any orientation
- **Optional Overload Protection is new design one directional clutch that will only slip in the lift direction**
- Meets: ASME/ANSI B30.16, OSHA, NASA-STD-8719.9 and EU Directives: 98/37/EC
- ATEX rated  II 3 GD c IIB 50° C X for limited use in Hazardous Environments

DUAL RATED

US Ton	Metric Tonne
3/4T	0.8t
1T	1.0t
1 3/4T	1.6t
2 1/4T	2.0t
2 3/4T	2.5t
3 1/2T	3.2t
7T	6.3t
10T	9.0t



**SHIPYARD
HOOK
OPTION**

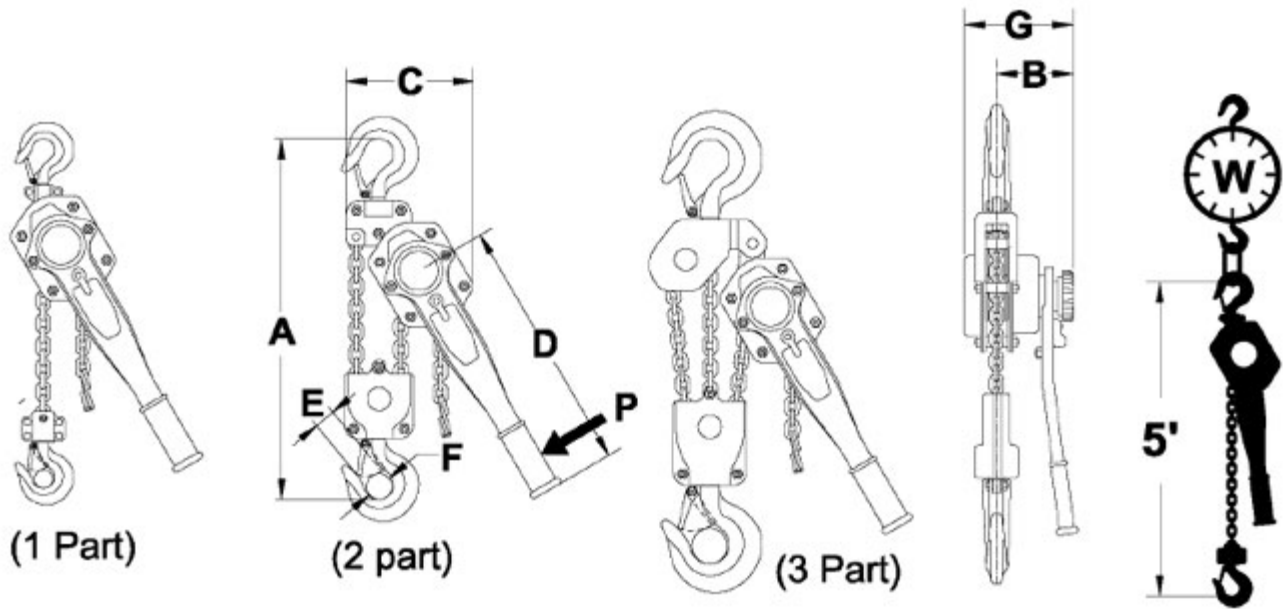

LA SERIES SPECIFICATIONS and DIMENSIONS

(inches and pounds, unless noted)

Base Model	(WLL) Working Load Limit				Chain	Parts	A" Min.	B"	C"	D"	E"	F"	G"	P (lbs)	W (lbs) /Ft.Lift	W(1) (lbs) 5' Lift
	US Ton	Metric Tonne	* Min Lbs	Load Kg												
LA008	3/4+	0.8	44	20	C6X18Z	1	13.4	3.9	5.2	10.5	1.02	0.7	6.2	41	0.54	14.9
LA010	1+	1.0	44	20	C6X18Z	1	13.4	3.9	5.2	12.1	1.02	0.9	6.2	51	0.54	15.3
LA016	1 3/4	1.6	70	32	C7X21Z	1	15.7	4.4	5.7	14.0	1.14	1.1	7.2	56	0.74	24.1
LA020	2 1/4	2.0	88	40	C8X24Z	1	18.1	4.6	7.6	14.0	1.38	1.0	8.1	56	0.92	36.2
LA025	2 3/4	2.5	110	50	C9X27Z	1	19.1	4.6	7.6	14.0	1.38	1.0	8.1	63	1.25	37.9
LA032	3 1/2	3.2	141	64	C10X28Z	1	20.5	4.8	7.8	16.5	1.46	1.3	8.3	72	1.50	44.8
LA063	7	6.3	278	126	C10X28Z	2	25.2	4.8	9.1	16.5	1.69	1.6	8.3	74	3.00	66.3
LA090	10	9.0	396	180	C10X28Z	3	28.7	4.8	13.3	16.5	1.69	1.7	8.3	76	4.50	110.6

* **Minimum Load** is the load required to activate the automatic load brake.

(1) Shipping weight can be estimated by adding aprox, 15% to "W" hanging weight

Standard lift is 5, 10, 15 and 20 Ft. Custom lifts are available.

Order by descriptive model number, example: Model **LA030-20V**

Model -Lift Option

LA030 -20 V

V = With Overload protection

S = With Shipyard hooks includes top and bottom (1.5 & 3t only)



CALL AMH AT (877)543-8264 FOR A DISTRIBUTOR NEAR YOU!

[Home / Products](#) | [About Us](#) | [Contact Us](#) | [News](#) | [On-Sale](#) | [Login](#) | [Service](#) | [Literature](#)

© 2005-2011. All Material Handling Inc. All Rights Reserved.