



Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams Low Headroom, Multiple Length Standard Lifting Beam

Low Headroom, Multiple Length Standard Lifting Beam

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Machined to exacting tolerances.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- ALL** lifting equipment individually proof loaded per OSHA requirements.
- Pictured with standard alloy swivel latch hooks.
- Ideally suited for low headroom lifting applications.
- Multiple latch hooks, eye latch hooks and shackle plates available. Please call for ordering assistance.

Working Load Limit in Pounds	Model Number Headroom (in) Weight (lbs)	Outside Length (L) in Feet				
		4	6	8	10	12
1,000	Part Number	11937	11959	11960	11961	11962
	HR = LBS =	13.11 56	13.11 75	13.11 95	13.11 115	13.11 200
2,000	Part Number	11983	11984	11985	11989	11990
	HR = LBS =	13.11 56	13.11 75	14.11 167	14.11 205	14.11 240
4,000	Part Number	12032	12033	12034	12039	12042
	HR = LBS =	15.12 98	15.12 135	16.12 200	16.12 295	17.12 395
6,000	Part Number	12069	12084	12087	12090	12094
	HR = LBS =	15.25 120	16.25 180	17.25 255	18.25 380	18.25 440
10,000	Part Number	12117	12123	12126	12129	12132
	HR = LBS =	21.25 265	21.25 345	21.25 430	22.25 500	21.12 590
15,000	Part Number	12162	12165	12168	12171	12174
	HR = LBS =	24.27 265	24.28 365	25.28 450	25.28 640	25.28 870
20,000	Part Number	12199	12202	12205	12208	12212
	HR = LBS =	23.75 290	24.75 375	24.75 625	26.75 755	29.75 985
30,000	Part Number	12223	12229	12232	12236	12263
	HR = LBS =	29.00 345	29.00 555	34.00 675	34.00 1,235	40.20 1,185
40,000	Part Number	12250	12254	12257	12287	12292
	HR = LBS =	33.81 445	33.81 850	33.81 1,050	41.79 1,195	41.97 1,540

Lifting Beams
Low Headroom, Multiple Length
Standard Lifting Beam

Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com





LIFTING BEAMS

RFID TRACKING



CHIP EQUIPPED

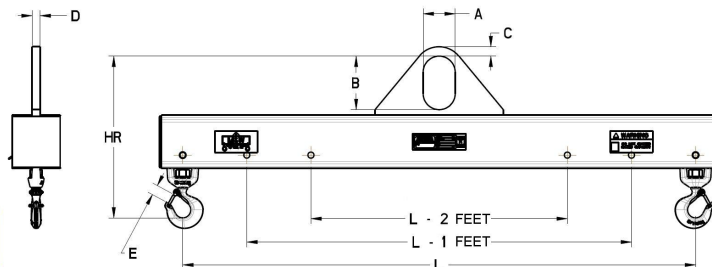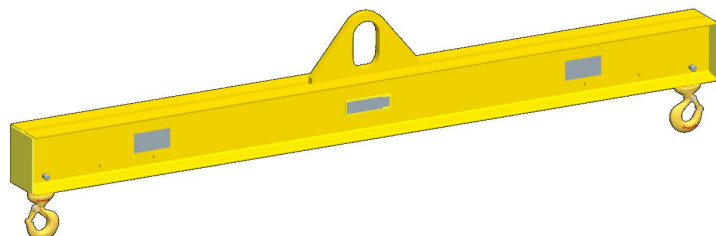

Outside Length (L) in Feet					Other Dimensions	Working Load Limit in Pounds
14	16	18	20	24		
11968 13.11 226	11971 14.11 313	11974 14.11 350	11977 14.11 390	11981 15.11 535	C=.875, A=3.0 B=5.0, D=.75 E=.91	1,000
12017 15.11 320	12018 15.11 365	12019 15.11 500	12020 16.11 525	12024 17.11 945	C=.875, A=3.0 B=5.0, D=.75 E=.91	2,000
12046 18.12 575	12050 18.12 650	12055 19.12 771	12059 20.12 1,060	12063 22.12 1,510	C=.875, A=3.0 B=5.0, D=.75 E=1.0	4,000
12098 19.25 635	12102 19.25 715	12106 20.25 990	12109 20.25 1,295	12112 22.25 1,310	C=1.25, A=3.0 B=5.0, D=1.00 E=1.00	6,000
12138 22.25 970	12141 22.25 1,095	12148 24.25 1,035	12152 24.25 1,340	12155 26.50 1,800	C=2.0, A=4.0 B=7.0, D=1.25 E=1.09	10,000
12177 27.28 1,000	12180 30.28 1,265	12183 30.28 1,405	12186 29.84 1,800		C=2.0, A=4.0 B=7.0, D=1.25 E=1.56	15,000
12215 29.75 1,595	12218 29.75 1,799	12280 35.08 1,655	12284 35.08 1,815		C=2.0, A=4.0 B=7.0, D=1.25 E=1.61	20,000
12267 40.48 1,540	12270 40.66 1,865	12274 40.84 2,250	12277 41.07 2,750		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	30,000
12295 42.15 1,850	12300 43.58 2,130	12304 43.74 2,555	12307 43.92 3,045		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	40,000