

HAND PUMP

Hydraulic P Series

152 cu. in.
Two-Speed Single-
and Double-Acting



P300 hand pump and 10 ton cylinders used for a vehicle lift.

BEST SUITED FOR APPLICATIONS WHERE THERE IS LITTLE OR NO FREE TRAVEL.

- Rugged all metal construction for strength and durability that won't burn through in welding environments.
- Heavy-duty, formed metal handle provides less flex, and less operator fatigue than round or composite handles.
- Convenient fill port on P23 and P55 allows pumps to be filled in a horizontal or vertical position.
- Fill cap seal acts as safety valve to prevent over-pressurizing of reservoir.
- Relief valve inboard of check valve prevents loads from drifting down.
- Large valve knob gives added control for slowly metering loads down.



P157/P159





P300



P460



P159D

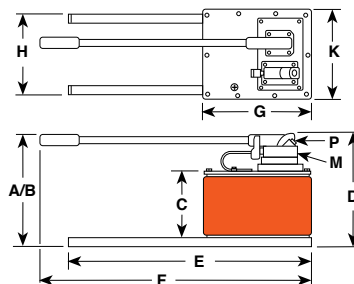

FK59
FK159B

Foot pump conversion kit

No. FK59 - Foot pump conversion kit for use on P55/P59 pumps. Wt., 6 lbs.

No. FK159B - Foot pump conversion kit for use on P157/P159 and P300/P300D pumps. Wt., 6 lbs.

Pump No.	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)	H (in.)	J (deg.)	K (in.)	L (in.)	M (in.)	N (in.)	P (in.)
P157/ P159	7 ³ / ₄	20 ¹ / ₂	4 ⁷ / ₈	6 ⁷ / ₈	22 ³ / ₄	3 ⁷ / ₈	3	19 ³ / ₄	39	5 ⁵ / ₁₆	3 ³ / ₄	3 ³ / ₈ NPTF	2 ¹ / ₄	—
P300	8 ¹ / ₄	21	4 ¹ / ₂	6 ⁷ / ₈	22 ⁵ / ₈	8 ¹ / ₂	7 ¹ / ₂	3	20 ²³ / ₃₂	39	5 ⁵ / ₁₆	3 ³ / ₄	3 ³ / ₈ NPTF	2 ¹ / ₄
P460	11 ¹ / ₈	31	6 ³ / ₄	11 ³ / ₈	24	29 ¹ / ₄	11	9	80	9 ¹ / ₂	—	3 ³ / ₈ NPTF	—	1 ¹ / ₄

For Use With	Order No.	Speed	Volume & Pressure		Maximum Pressure (psi)		Reservoir Handle Effort (lbs.)	Oil Capacity (cu.in.)	Usable Oil Capacity (cu. in.)	Oil Port (in.)	Product Weight (lbs.)
			Volume per Stroke (cu. in.)	LP	HP	LP					
Single-Acting	P157	2	.650	.160		1,400	10,000	140	152	137	26.7
	P159	2	2.6	.160		325	10,000	140	152	137	26.2
Cylinders*	P300	2	2.6	.160		325	10,000	140	1.5 gal.	310	55.3
	P460	2	7.35	.294		325	10,000	90	2.5 gal.	460	54.9
Double-Acting	P157D	2	.650	.160		1,400	10,000	140	152	137	28.8
	P159D	2	2.6	.160		325	10,000	140	152	137	27.9
Cylinders**	P300D	2	2.6	.160		325	10,000	140	1.5 gal.	310	57.0
	P460D	2	7.35	.294		325	10,000	90	2.5 gal.	460	57.9

LP = Low Pressure
HP = High Pressure

* Pump includes 2-Way Valve

** Pump includes 4-Way Valve