


AIR PUMP


Hydraulic PA6 Series Single-Acting

**COMPACT, LIGHTWEIGHT
AND PORTABLE. SINGLE-SPEED
PUMPS DESIGNED TO DRIVE SINGLE-
ACTING CYLINDERS.**

- The power unit of choice for major manufacturers of auto body, frame straighteners and other equipment.
- Operate at 40-100 psi shop air pressure at the pump.
- dBA 85 at 10,000 psi.
- Serviceable pump motor is not a “throw away”, providing economical repair.
- Permanently vented reservoir cap.
- Internal relief valve protects circuit components, air inlet filter protects motor.

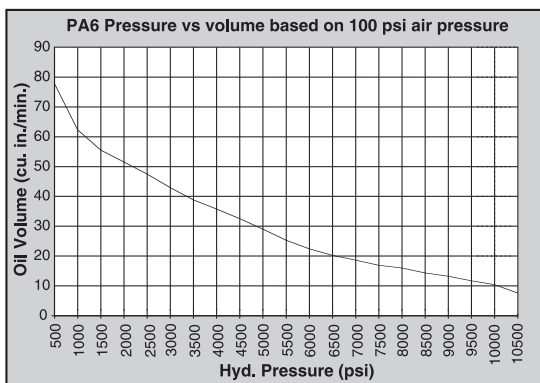

10,000 psi

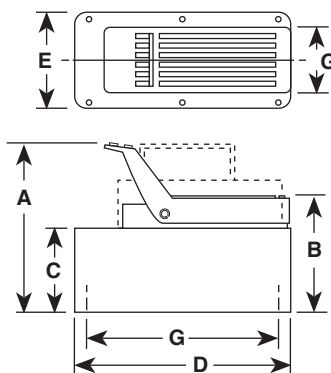


Pump No.	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	G (in.)
PA6	7 ³ / ₄	5 ⁷ / ₈	4 ³ / ₈	9 ¹ / ₂	5	4 x 9
PA6A	7 ³ / ₄	5 ⁷ / ₈	4 ³ / ₈	9 ¹ / ₂	5	4 x 9
PA6AM	7 ³ / ₄	5 ⁷ / ₈	4 ³ / ₈	9 ¹ / ₂	5	4 x 9
PA6M	7 ³ / ₄	5 ⁷ / ₈	4 ³ / ₈	9 ¹ / ₂	5	4 x 9
PA6R	7 ³ / ₄	5 ⁷ / ₈	4 ³ / ₈	9 ¹ / ₂	5	4 x 9
PA6RM	7 ³ / ₄	5 ⁷ / ₈	4 ³ / ₈	9 ¹ / ₂	5	4 x 9
PA6M-1	7 ⁷ / ₈	6	4 ³ / ₈	12 ⁵ / ₈	7 ³ / ₈	—
PA6-2	10 ¹ / ₄	8	7	11 ¹ / ₂	9 ¹ / ₂	5 ¹ / ₈ x 7 ¹ / ₈




PA6M-1



PA6-2



Typical Set-up
Hook-up for single-acting cylinders



Description	Order No.	Air Supply Req'd (psi)	Reservoir		Oil Port (in)	Prod. Wt. (lbs.)
			Cap. (cu. in.)	Usable (cu. in.)		
Base model pump with high density polyethylene reservoir.	PA6	40-120	105	98	$\frac{3}{8}$ NPTF	14
PA6 with externally adjustable relief valve.	PA6A	40-120	105	98	$\frac{3}{8}$ NPTF	15
PA6A with metal reservoir.	PA6AM	40-120	105	98	$\frac{3}{8}$ NPTF	17
PA6, except has metal reservoir.	PA6M	40-120	105	98	$\frac{3}{8}$ NPTF	18
PA6 with 12 foot remote control.	PA6R	40-120	105	98	$\frac{3}{8}$ NPTF	20.58
PA6R, except has metal reservoir.	PA6RM	40-120	105	98	$\frac{3}{8}$ NPTF	21.58
PA6, except has 1 gallon metal reservoir.	PA6M-1	40-120	1 gal.	185	$\frac{3}{8}$ NPTF	23.7
PA6, except has 2 gallon, high density polyethylene reservoir.	PA6-2	40-120	2 gal.	454	$\frac{3}{8}$ NPTF	24.5
PA6, except has 2½ gallon metal reservoir.	PA6M-2	40-120	2½ gal.	570	$\frac{3}{8}$ NPTF	32.1