

# Bearing Cup and Bearing Pullers

▼ Shown: **BHP-380**



## Bearing Cup Puller

- Made of high strength steel alloy
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts
- Adjustable to fit a variety of bearings and seals

## BHP Series

Puller Set Capacity:

**8, 20, 30 and 50 tons**

Maximum Reach:

**4.33-5.71 inches**

Maximum Spread:

**4.33-14.17 inches**

Maximum Operating Pressure:

**10,000 psi**

### ▼ SELECTION CHART

Puller Set Capacity**		8 ton	20 ton	30 ton	50 ton
<b>30 Bearing Cup Puller</b>					
Model Number ►		<b>BHP-180</b>	<b>BHP-280</b>	<b>BHP-380</b>	<b>BHP-580</b>
Spread*	Max.	4.33	8.66	14.17	14.17
	Min.	1.06	.98	1.97	1.97
Reach*	Max.	4.33	5.51	5.71	5.71
	Min.				
Center Screw	Thread	3/4"-16 UNF	1"-8 UNC	1 1/4"-7 UNC	1 5/8"-5.50 NS

\* Dimensions in inches.

\*\* Puller capacity, not attachment capacity. See Warning box!



### WARNING!


Do not exceed 50% of the rated puller capacity when using a double crosshead (2 griparms) or when using puller legs in combination with bearing puller attachment.

▼ Shown: **BHP-382**




## Bearing Puller

- Made of high strength steel alloy
- Wedge-shaped edges allow removal of the most hard-to-grip components
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts

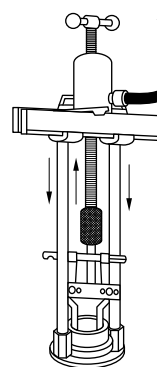

◀ Bearing Cup Puller shown with Crosshead Puller attachment.

Bearing Puller shown with Crosshead Puller attachment. ▶




### ▼ SELECTION CHART

Puller Set Capacity**		8 ton	20 ton	30 ton	50 ton
<b>40 Bearing Puller</b>					
Model Number ►		<b>BHP-181</b>	<b>BHP-282</b>	<b>BHP-382</b>	<b>BHP-582</b>
Spread*	Max.	4.09	5.12	9.65	9.65
	Min.	.98	.39	.67	.67
Width*		4.96	5.91	11.50	11.50
Thread		5/8"-18 UNF	5/8"-18 UNF	1"-14 UNF	1 1/4"-12 UNF

\* Dimensions in inches.

\*\* Puller capacity, not attachment capacity. See Warning!



### Bearing Puller

Bearing Puller has wedge shaped edges for placing puller behind hard to reach bearings, gears, etc., where clearance prevents direct application of grip puller arms.

The Bearing Puller can be used with the Cross Bearing Puller or the Grip Puller.