



Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

**Lifting Beams**  
**Adjustable Length Lifting Beams**  
**with Swivel Hook bottoms**


**Adjustable Length Lifting Beams with Swivel Hook bottoms**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to low headroom applications.
- Pictured with standard alloy swivel latch hooks.
- Eye hooks and custom connections available - call for ordering assistance.

RFID TRACKING



CHIP EQUIPPED

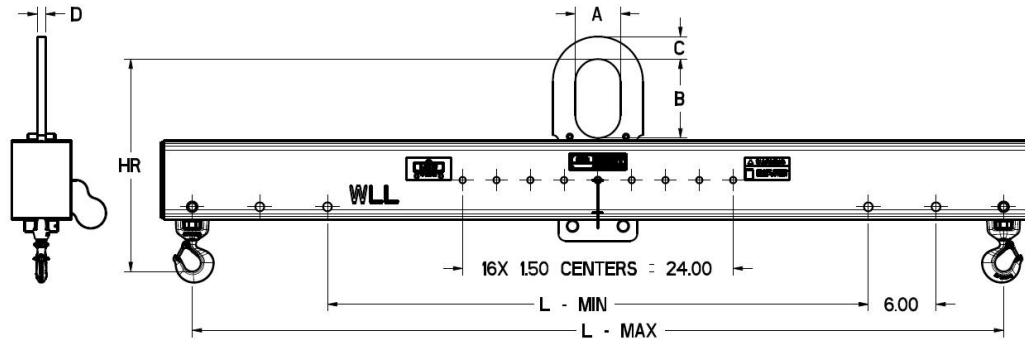

Working Load Limit in Pounds*	Part Number	L min	L max	A	B	C	D	HR	Weight in Pounds
2,000	<b>16410</b>	48	72	3	5	0.75	0.63	13.8	85
2,000	<b>16411</b>	120	144	3	5	0.75	0.63	15.7	285
4,000	<b>16412</b>	48	72	3	5	1.5	0.63	14.6	135
4,000	<b>16413</b>	120	144	3	5	1.5	0.63	16.6	330
6,000	<b>16414</b>	48	72	3	5	1.5	0.63	16.2	160
6,000	<b>16415</b>	120	144	3	5	1.5	0.63	19.1	530
8,000	<b>16416</b>	48	72	4	7	2	0.75	18.9	200
8,000	<b>16417</b>	120	144	4	7	2	0.75	20.9	540
10,000	<b>16418</b>	48	72	4	7	2	0.75	21.2	300
10,000	<b>16419</b>	120	144	4	7	2	0.75	22.2	795
15,000	<b>16420</b>	48	72	4	7	2	1.00	22.1	315
15,000	<b>16421</b>	120	144	4	7	2	1.00	25.1	815

\* Call for specifications on larger sizes and capacities

